




TECHNICAL DATA : ABT CB SERIES

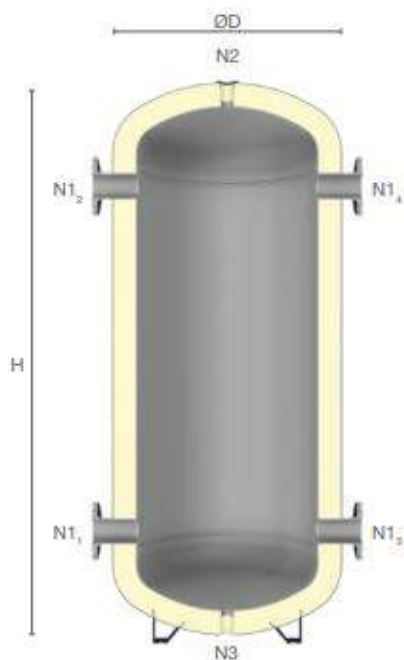

Capacity	V	lt	100	300	500	800	1000	1500	2000	2500	3000	4000
Insulation Type & Thickness	i	mm	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80	SPU/80
Diameter	ØD	mm	540	760	800	910	1010	1120	1310	1460	1460	1660
Height	H	mm	1115	1225	1850	2110	2070	2375	2280	2160	2580	2575
Primary/Secondary Energy Inlet/Outlet Connections	N1	inch/DN	Threaded 1½"	Threaded 2"	Threaded 2½"	Flanged DN80	Flanged DN100	Flanged DN100	Flanged DN100	Flanged DN100	Flanged DN100	Flanged DN100
Air Ventilation Connection	N2	inch	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"
Blind Connection	N3	inch	1¼"	1¼"	1¼"	1¼"	1¼"	2"	2"	2"	2"	2"
Gross Weight	G	kg	46	80	118	199	215	311	385	540	593	806
Tilt Height	R	mm	1240	1440	2015	2300	2305	2625	2630	2610	2965	3065